


GHV

MECHANICAL SYSTEM WITH VISIBLE CLIPS 6 TO 11MM THICK TILES

HORIZONTAL SECTION

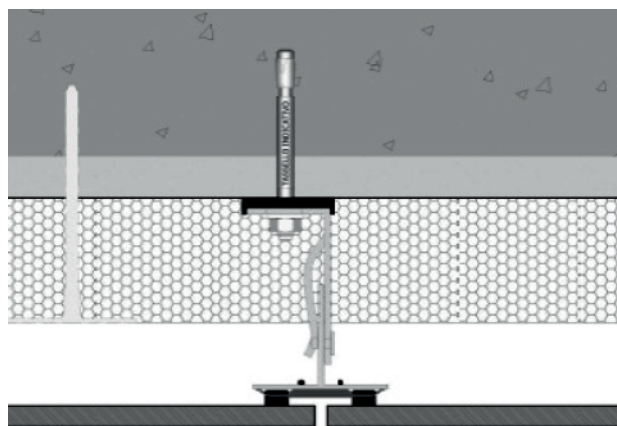

VERTICAL SECTION



GHV ventilated facades consist of the following components:

- L-section **anchor bracket**, with **stainless steel anchor bolts** and **thermal spacer** to be positioned between the anchor bracket and the building wall.
- Black painted T-section **uprights**
- Black painted **stainless steel plate**, complete with **clips which can be disassembled**, individually painted in the **same color as the tiles and gaskets**.
- **6 to 11mm thick porcelain tiles**, usually with continuous vertical joint.